



FIG. 1A




49" (1911 pr.) 1917 pr.) 181 pr.) 18 pr. 18 pr.) 18 pr. 18 pr.) 18 pr. 18 pr.) 18 pr.] 18 pr.] 18 pr.)

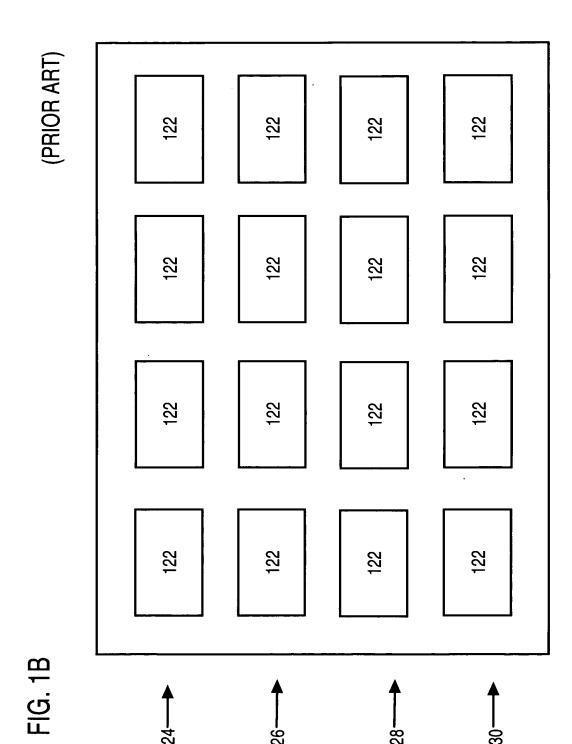

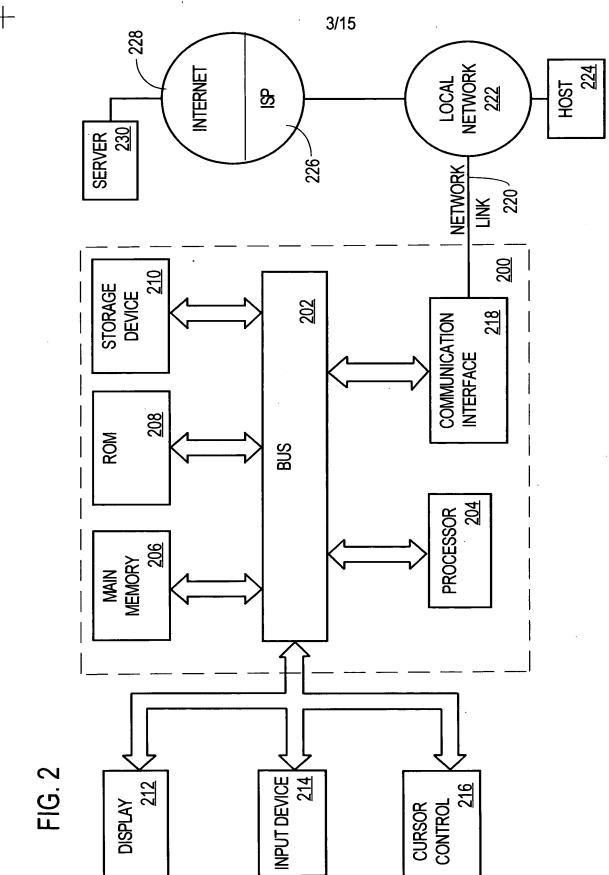

The part of the second of the

4/15

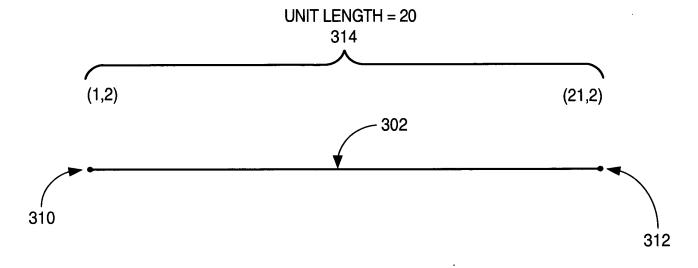

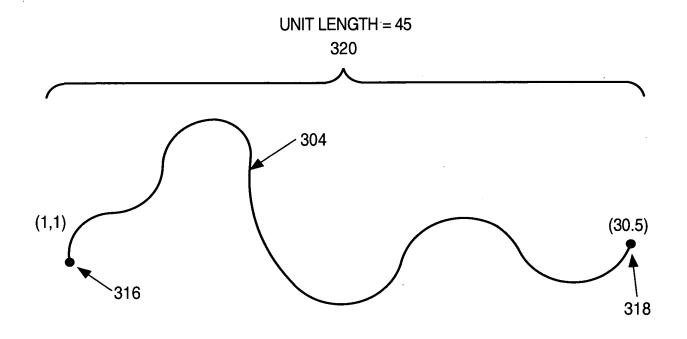
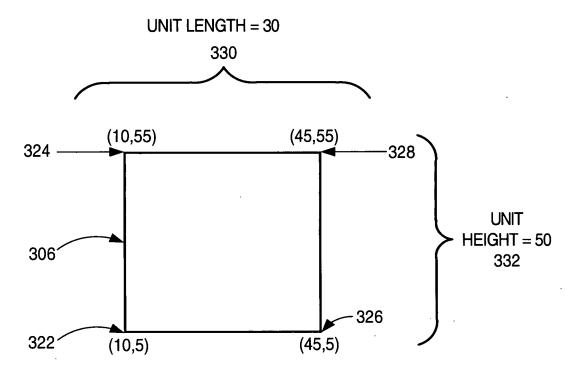


FIG. 3A




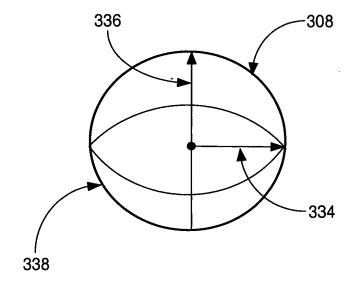



FIG. 3B





The stand stand are the stand of the standard st


6/15

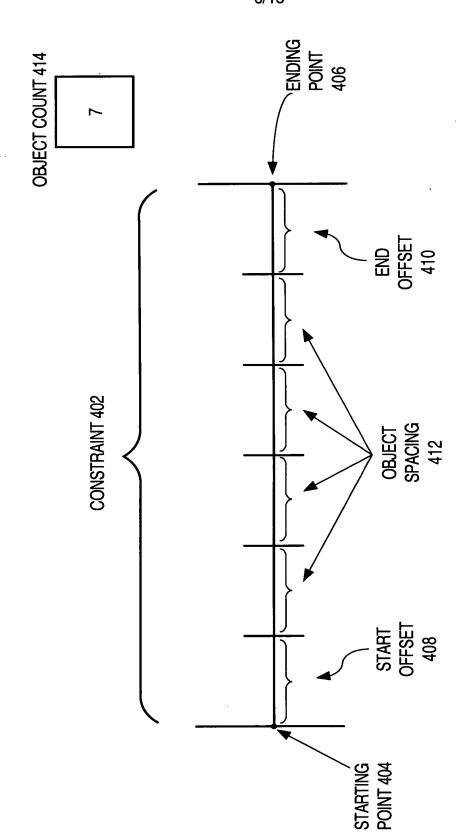

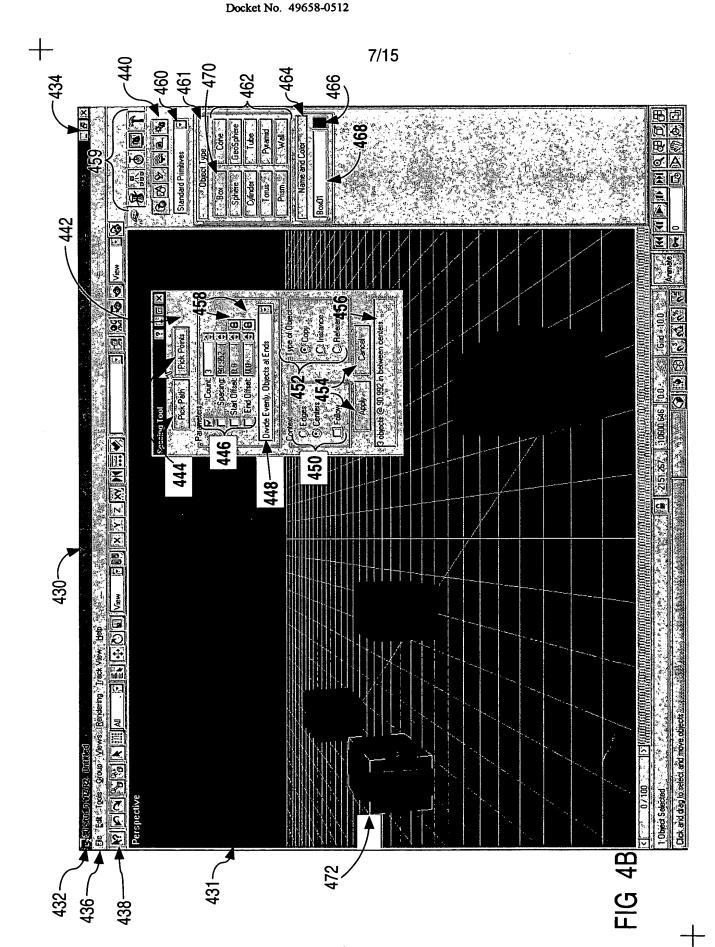



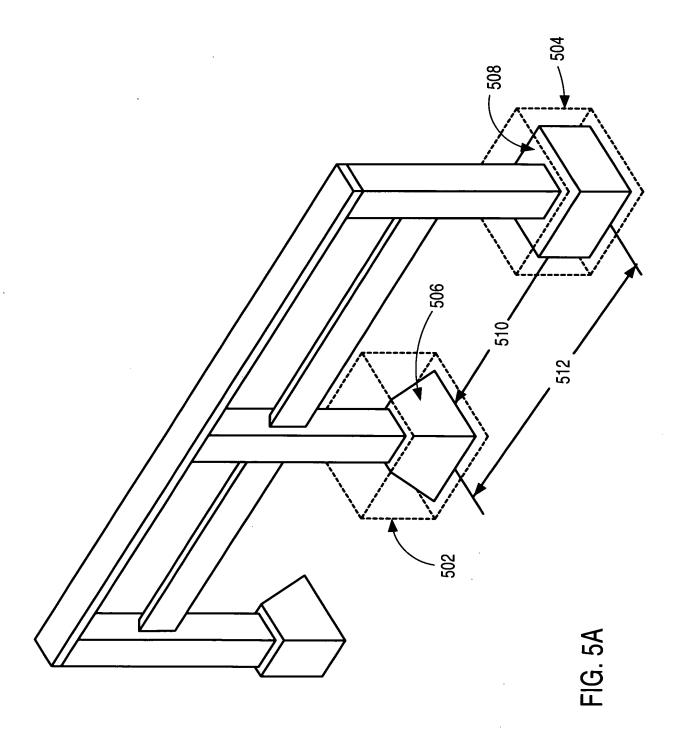

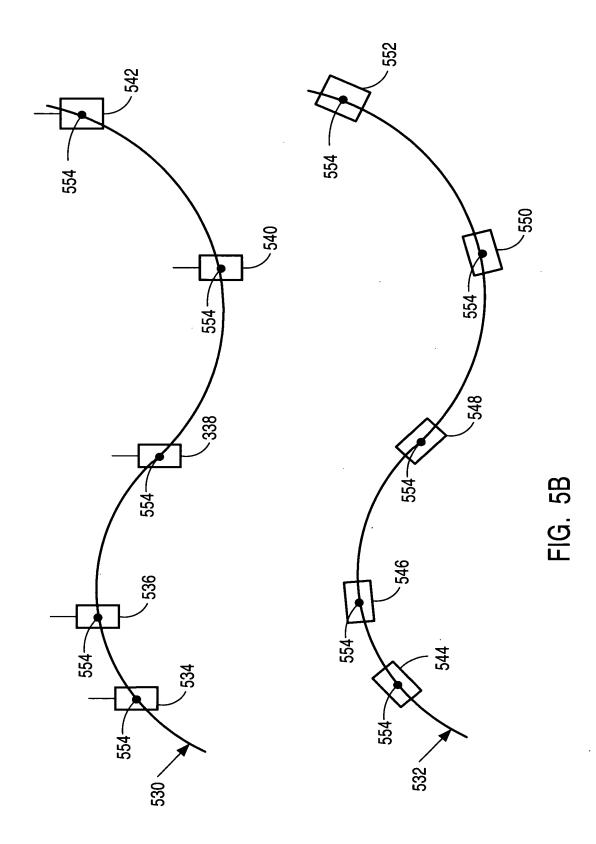


+

10/15

## SUPPLIED SPACING PARAMETERS

OBJECT COUNT = 5 CONSTRAINT LENGHT = 100 UNITS

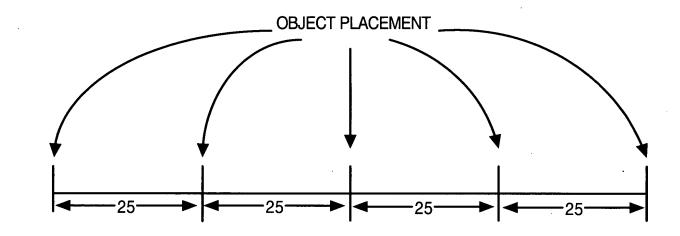

GENERATED GRID ATTRIBUTE VALUES

START OFFSET = 0 UNITS

END OFFSET = 0 UNITS

SPACING = 25 UNITS

FIG. 5C




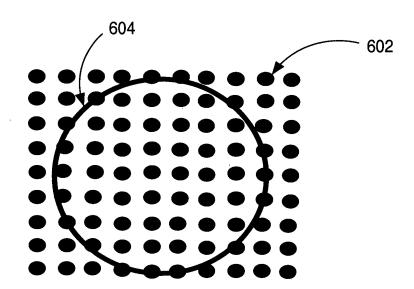


FIG. 6

11/10 11/10

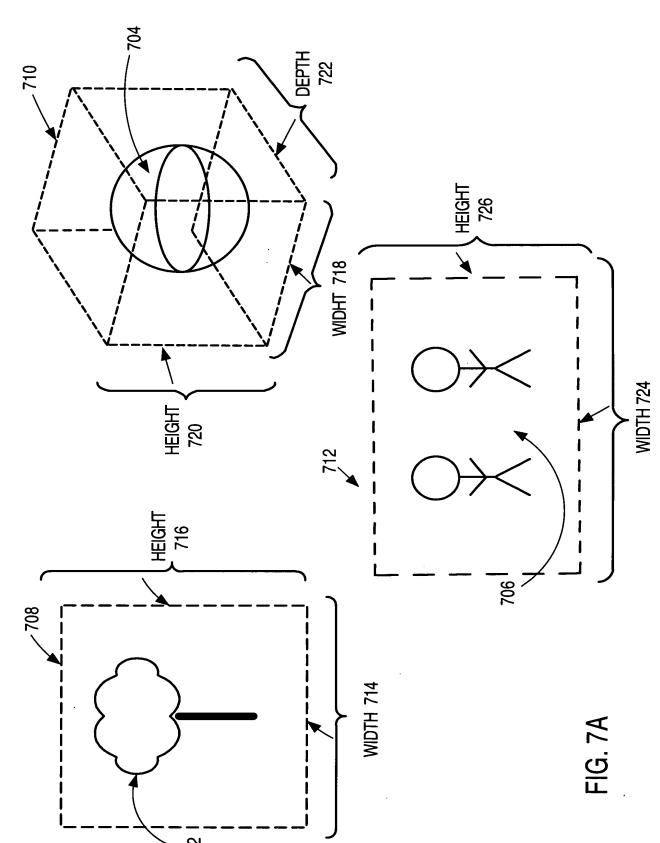

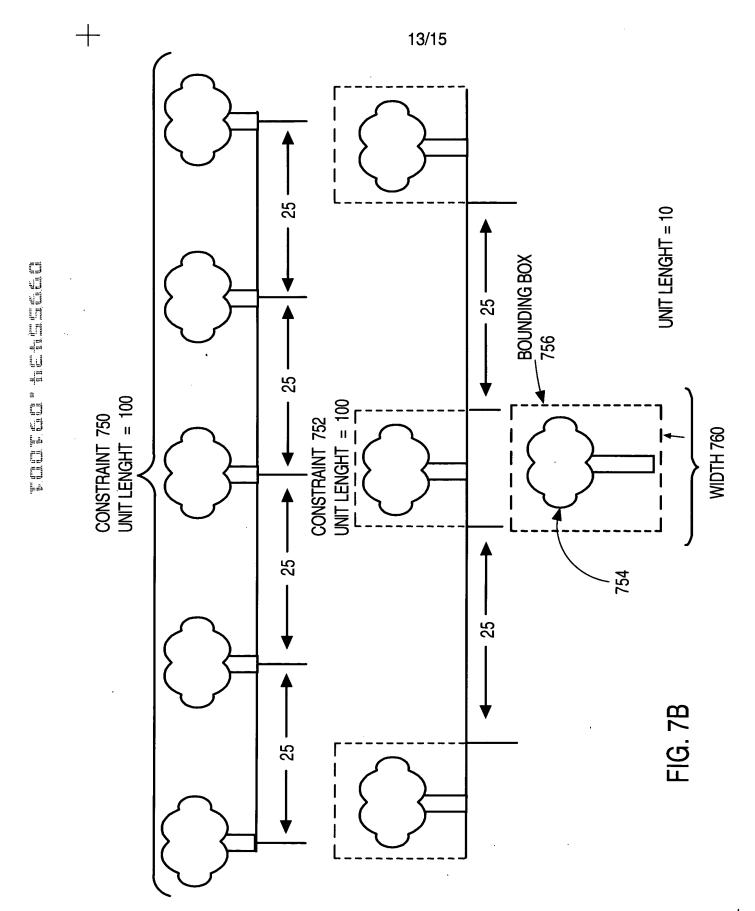

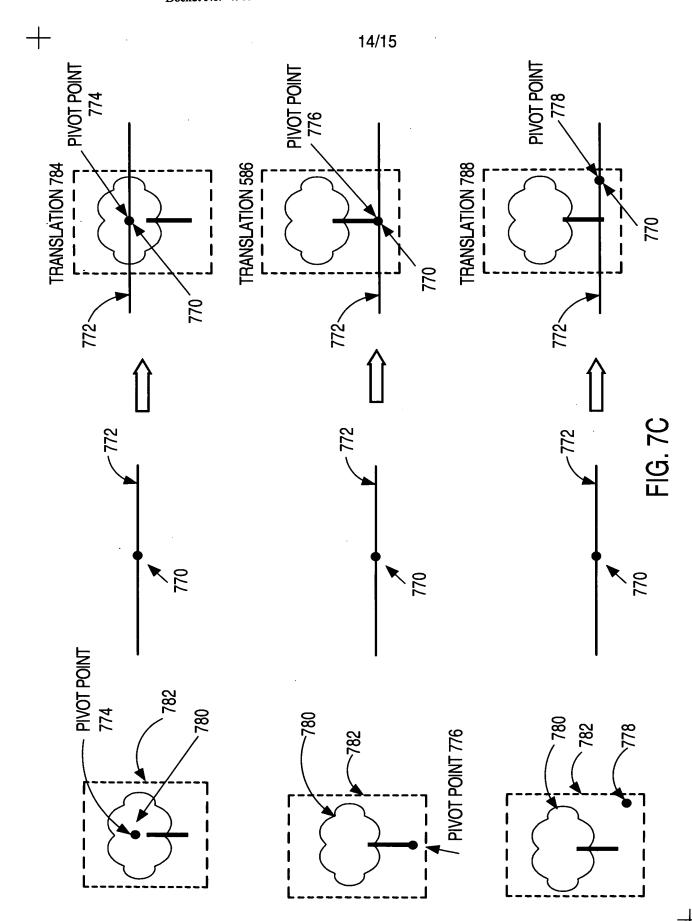

Docket No. 49658-0512

15/15

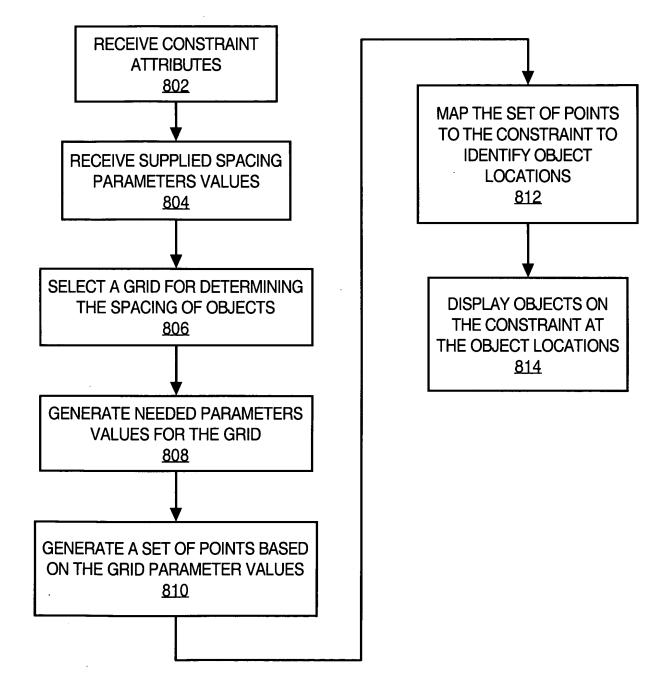


FIG. 8

Professional Professional Professional Company of the Company of t